

## Dane techniczne:

Kubatura:	251 m <sup>3</sup>
Powierzchnia zabudowy:	59.24 m <sup>2</sup>
Powierzchnia całkowita:	93.21 m <sup>2</sup>
Powierzchnia netto:	75.78 m <sup>2</sup>
Powierzchnia użytkowa:	75.78 m <sup>2</sup>
Wymiary domu:	6.2 x 10.37 m
Minimalne wymiary działki:	13.2 x 18.37 m
Wysokość do kalenicy:	7,07 m / 23,19 ft
Powierzchnia dachu:	112.31 m <sup>2</sup>
Kąt nachylenia dachu:	45 degrees

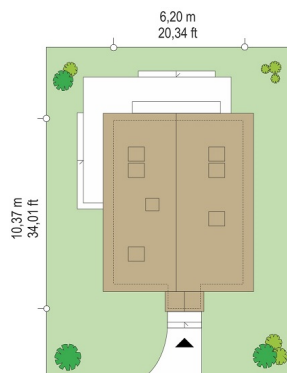
## Koszty realizacji:

Realizacja stanu surowego otwartego:	13 600
Realizacja stanu surowego zamkniętego:	23 100
Koszt robót wykończeniowych:	28 900
Realizacja domu pod klucz:	51 900

Koszty są podane w cenach netto, należy doliczyć podatek VAT

## Materiały:

- Foundations - poured reinforced concrete
- External walls - aerated concrete 24 cm + polystyrene or porotherm 25 blocks + polystyrene
- Ceiling - wooden beams
- Elevation - thin-layer acrylic plaster
- Roof - tile or meatal roofing tile

**CENA PROJEKTU: 830.00 \$**

	Energy-saving package	bezpł.
	Ventilation and fireplace package	90
	Central vacuum package	70
	The electronic version of the project	120
	Air conditioning package	80
	Fencing projects	140
	Septic tanks sealed package	bezpł.

Kid house is the building of a simple block with a gable roof. Detached house (or summer house), for a family of three to four people. Kid has an unpretentious architecture and functional interior. On the ground floor, besides the living room we designed large hall with stairs to the attic, kitchen and bathroom. At the attic there are two or three bedrooms. House, due to the simple design is inexpensive in construction and subsequent use. There is also a mirror version of the Kid house plan.

## Rzuty:



## Elewacje:

